



STREAMTEKTM PRODUCT CATALOG

CONTACT US



www.stream-tek.com

US & Canada: 1-888-218-6548

Worldwide: 1-705-770-4455

At Streamtek Corp. we strive to provide our clients with superior customer service and the best quality in compressed air products. We find that building long-term customer relationships based on trust and high service standards will help us better address your needs and concerns.



Filter Separators

Streamtek's Filter Separators are used to prevent contaminants from plugging or damaging your compressed air-operated products. They are ideal for removing dirt, water and rust from your compressed air system.

The Filter Separators incorporate an automatic Drain Filter, metal bowl and a 5 micron filter element.

When the bowl becomes full, an internal float will automatically activate the drain. The block-head design with integrated mounting holes eliminates costly mounting plates and adapters, making our Filter Separators easier to use and install.

Filter Separators	
FTR014-2	1/4" NPT Auto Drain Filter, 43 SCFM
FTR038-1	3/8" NPT Auto Drain Filter, 75 SCFM
FTR012-2	1/2" NPT Auto Drain Filter, 100 SCFM
FTR034-1	3/4" NPT Auto Drain Filter, 230 SCFM
FTR100-1	1" NPT Auto Drain Filter, 300 SCFM



Oil Removal Filters

Streamtek's Oil Removal Filters remove oil particulates that are commonly found in many compressed air systems. To trap submicron particles, a .03 micron element is used. The automatic float activates the drain when full. Oil Removal Filters sold by our fellow competitors will work with ALL Streamtek products!

Oil Removal Filters	
Model #	Description
OIL014-1	1/4" NPT Auto Drain Filter, 24 SCFM
OIL038-1	3/8" NPT Auto Drain Filter, 37 SCFM
OIL034-1	3/4" NPT Auto Drain Filter, 180 SCFM




Drum Dolly


Streamtek Drum Dollies to move and position a 5-gallon (19 liter), 30-gallon (114 liter) and 55-gallon (208 liter) drum. They can be used with our Reversible Drum Storm! They have a steel construction and feature a wide-stance base with four 3" (7.6 cm) polyolefin swivel casters.




Model FTR014-2 & FTR038-1




Model FTR012-2




Model FTR034-1 & FTR100-1



Model OIL014-1 & OIL038-1



Model OIL034-1



Drum Dolly	
Model #	Description
DS0DLY-01	Drum Dolly, 55 Gal., 900 lb. capacity
DS0DLY-02	Drum Dolly, 30 Gal., 700 lb. capacity
DS0DLY-03	Drum Dolly, 5 Gal., 200 lb. capacity

Model DS0DLY-01




Pressure Regulators

Streamtek's Oil Removal Filters remove oil particulate that is commonly found in many compressed air systems. To trap submicron particles, a .03 micron element is used. The automatic float activates the drain when full.

NOTE: Pressure Regulators sold by our fellow competitors will work with ALL STREAMTEK products! Please contact an Application Engineer if you wish to confirm compatibility.


Pressure Regulators	
Model #	Description
PR014-1	1/4" NPT Regulator, 49 SCFM
PR038-1	3/8" NPT Regulator, 84 SCFM
PR012-1	1/2" NPT Regulator, 84 SCFM
PR034-1	3/4" NPT Regulator, 220 SCFM
PR014-11	Gauge Only, 1/4" NPT

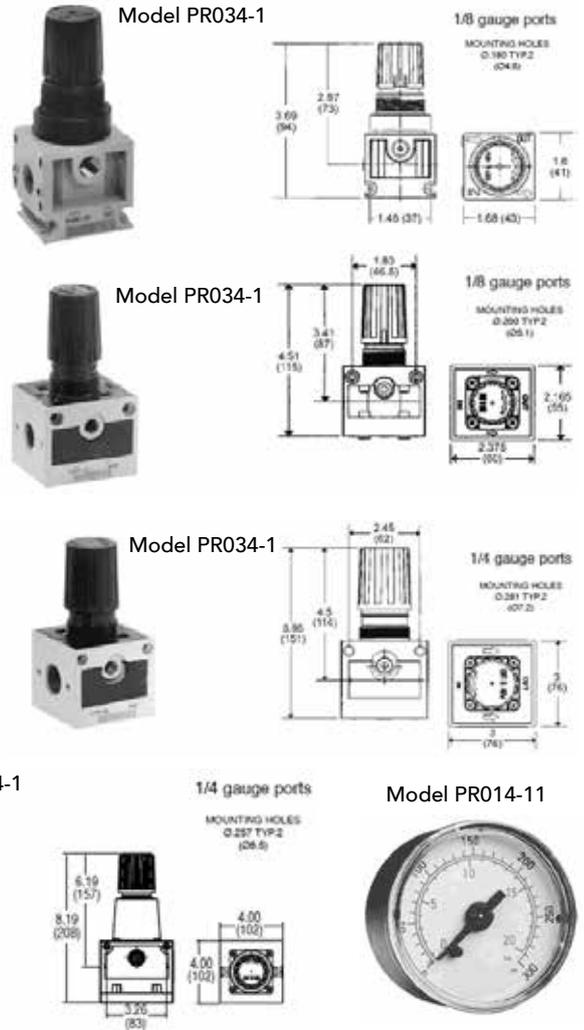

Sintered Bronze Mufflers

Streamtek's ALL NEW low-cost Sintered Bronze Mufflers effectively reduce air exhaust noises to industry-accepted levels with minimum flow restriction. They protect valves, screw drivers, impact wrenches and

various other tools by preventing direct air pressure from entering the system. They are non-corrosive and can be cleaned with many solvents.

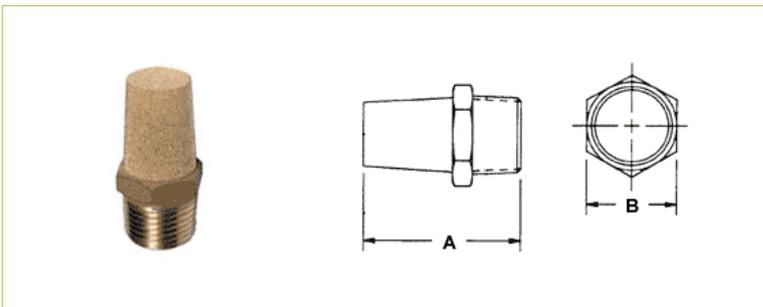


Sintered Bronze Mufflers			
Thread Size	Model #	Overall Length (A)	Hex (B)
10-32	SBM1032	0.75" (19.1mm)	0.38" (9.5mm)
1/8 NPT	SBM0018	0.84" (21.4mm)	0.44" (11.1mm)
1/4 NPT	SBM0014	1.20" (30.6mm)	0.56" (14.3mm)
3/8 NPT	SBM0038	1.45" (36.7mm)	0.69" (17.5mm)
1/2 NPT	SBM0012	1.89" (48.0mm)	0.88" (22.2mm)
3/4 NPT	SBM0034	2.12" (54.0mm)	1.06" (27.0mm)
1 NPT	SBM0100	2.84" (72.2mm)	1.31" (33.3mm)
1-1/4 NPT	SBM0114	3.44" (87.3mm)	1.69" (42.9mm)
1-1/2 NPT	SBM0112	4.00" (101.6mm)	2.00" (50.8mm)
2 NPT	SBM0200	4.75" (120.7mm)	2.38" (60.3mm)



Straight-Through Mufflers

The Straight-Through Silencing Muffler is an affordable low-cost way to significantly reduce the exhaust air noise within your plant. The straight-through bore is precision engineered for higher flow applications to keep back pressure at a minimum.

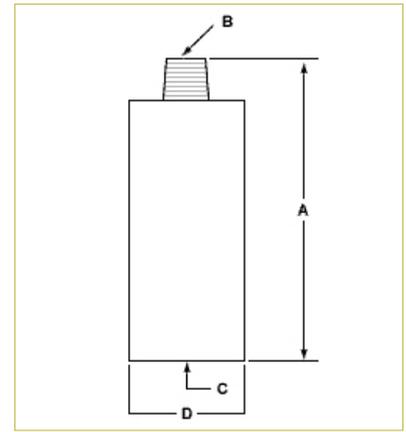

The outer shell is lined with sound absorbing foam for increased noise reduction. It's also constructed entirely of stainless steel to withstand both high temperatures and corrosive environments. They are very easy to install into the exhaust port of vortex tubes, valves, air cylinders, pumps, etc. Expect approximately 23 dBA of noise reduction!

Questions? Call Us
 +1-705-770-4455
 or email
support@stream-tek.com.

Straight-Through Mufflers					
Model #	Rated Flow	Length (A)	NPTM (B)	NPTF (C)	Width (D)
STM014	25 SCFM (708 SLPM)	4.00" (102mm)	1/4	1/4	1.5" (38mm)
STM038	55 SCFM (1557 SLPM)	4.13" (105mm)	3/8	3/8	1.5" (38mm)
STM034	75 SCFM (2123 SLPM)	9.75" (248mm)	3/4	3/4	2.0" (51mm)

Compressed Air Hose

Streamtek's Compressed Air Hose (3/8" ID) will assure long life and protection against weathering, ozone and temperatures reaching 70° C (160° F). Includes 1/4" NPTM brass fittings on each end! Lengths available are 10', 15', 20', 30', 40' and 50'.



Compressed Air Hose	
Model #	Description
CAH0010	3/8" Air Hose, 10' (305cm)
CAH0015	3/8" Air Hose, 15' (457cm)
CAH0020	3/8" Air Hose, 20' (610cm)
CAH0030	3/8" Air Hose, 30' (914cm)
CAH0040	3/8" Air Hose, 40' (1219cm)
CAH0050	3/8" Air Hose, 50' (1524cm)

"This is truly a great addition to our production line. It is certainly nice to buy something that performs much better than advertised."
Jory, Gosling, TX

Coiled Hose with Swivel

Streamtek's Coiled Hose with Swivels are 12 feet (3.05m) long and are available in 1/8, 1/4 and 3/8 NPT. It features a long-lasting premium coil hose that will retain its coil strength for years to come. There are spring guards for extra strain relief.



Coiled Hose with Swivel	
Model #	Description
CAH18-S	Coiled Hose with Swivel, 1/8 NPT
CAH14-S	Coiled Hose with Swivel, 1/4 NPT
CAH38-S	Coiled Hose with Swivel, 3/8 NPT



AC Sensor

The **Model SC-ACSN** AC Sensor is a hand-held device for determining the presence or absence of AC in insulated wires, wall receptacles, fuses, junction boxes, switches and other voltage-carrying electrical systems.

Conveying Hose

The Streamtek PVC Conveying Hose comes in the lengths of 10', 20', 30', 40', 50'. Internal diameters available are 3/4", 1", 1-1/4", 1-1/2", and 2". Simply choose the hose diameter and length from the table below:




PVC Conveying Hose	
Model #	Description
PVC034-10	Conveying Hose, 3/4" ID x 10'
PVC034-20	Conveying Hose, 3/4" ID x 20'
PVC034-30	Conveying Hose, 3/4" ID x 30'
PVC034-40	Conveying Hose, 3/4" ID x 40'
PVC034-50	Conveying Hose, 3/4" ID x 50'
PVC100-10	Conveying Hose, 1" ID x 10'
PVC100-20	Conveying Hose, 1" ID x 20'
PVC100-30	Conveying Hose, 1" ID x 30'
PVC100-40	Conveying Hose, 1" ID x 40'
PVC100-50	Conveying Hose, 1" ID x 50'
PVC114-10	Conveying Hose, 1-1/4" ID x 10'
PVC114-20	Conveying Hose, 1-1/4" ID x 20'
PVC114-30	Conveying Hose, 1-1/4" ID x 30'
PVC114-40	Conveying Hose, 1-1/4" ID x 40'
PVC114-50	Conveying Hose, 1-1/4" ID x 50'
PVC112-10	Conveying Hose, 1-1/2" ID x 10'
PVC112-20	Conveying Hose, 1-1/2" ID x 20'
PVC112-30	Conveying Hose, 1-1/2" ID x 30'
PVC112-40	Conveying Hose, 1-1/2" ID x 40'
PVC112-50	Conveying Hose, 1-1/2" ID x 50'
PVC200-10	Conveying Hose, 2" ID x 10'
PVC200-20	Conveying Hose, 2" ID x 20'
PVC200-30	Conveying Hose, 2" ID x 30'
PVC200-40	Conveying Hose, 2" ID x 40'
PVC200-50	Conveying Hose, 2" ID x 50'



Panel Cooler Side Mount Kits

Streamtek's new Panel Cooler Side Mount kit allows quick and easy mounting to the side of an enclosure where top-mounting is not possible

due to obstructions or limited space above the enclosures. The Cabinet Panel Cooler maintains the rating of the enclosure and protects the electronics inside from moisture, heat, and dirt.

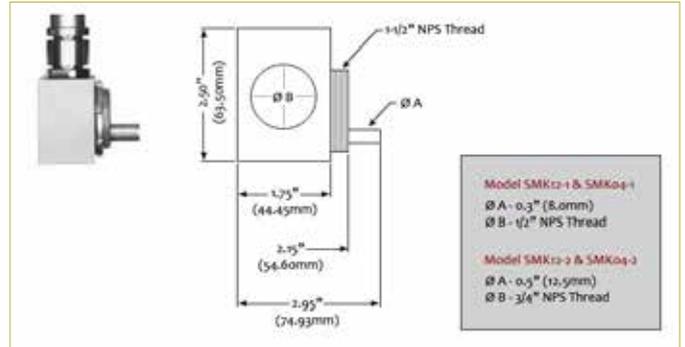

Panel Cooler Side Mount Kits	
Model #	Description
SMK12-1	NEMA 12 Side Mount Kit - Only for 550 BTU/Hr. Cooler
SMK12-2	NEMA 12 Side Mount Kit - For all Coolers except 550 BTU/Hr
SMK04-1	NEMA 4/4X Side Mount Kit - Only For 550 BTU/Hr. Cooler
SMK04-2	NEMA 4/4X Side Mount Kit - For all coolers except 550 BTU/Hr



Output Power Supply

Two outputs for two bar operation. This output power supply can be used alongside our static eliminators such as: Ionizing Air Gun, Ionizing Ion Bar, Advanced Ion Air Knife & Regular Ion Air Knife.

Cold Air Distribution Kit

It includes 6ft of flexible clear vinyl tubing to direct the cold air throughout your cabinet. Tubing connectors with adhesive backed clips to hold the tubing in place.



Mounting Brackets

Stainless steel L shaped mounting brackets for Threaded Air Conveyors and Non-Threaded Air Conveyors.

